Beacon Muse - 3000K on-board dimming - 13W

Beacon Muse 3000K DIM L3 SIL **2051068**



Range features

- Fully adjustable spotlight using cutting edge LED technology and adjustable lens
- Adjustable optics provides wide flood 65 degrees which can be adjusted to 10 degree spot without the need for additional lenses and reflectors
- Cast cooling fin design to maximise thermal management and reduction of LED junction temperature
- IR/UV free light source without heat radiation
- On-board dimming available
- Long Life 50K hours, fit and forget maintenance free lighting solution
 - Choice of colour temperature warm 3000K & neutral 4000K
- Beacon Muse offers high CRI minimum 90 (typical 95) ideal for museum, galleries and high end shop lighting applications



PRODUCT OVERVIEW

Ordering number	2051068
Technology	LED
Dimmable	Yes
EAN code	5025768510689
Certifications	F-mark
Mount	Three circuit track
Housing	Die-cast aluminium
CRI (Ra)	95
Beam angle (°)	10° Wide flood 65°
Colour temperature (K)	3000
Voltage (V)	230
Lamps	13W Citizen CITILED Warm 3000k
Colour	Silver
Included lamp	Integrated LED
IP rating	20

Beacon Muse - 3000K on-board dimming - 13W

Beacon Muse 3000K DIM L3 SIL

2051068

General data		
Ordering number	2051068	
Technology	LED	
Dimmable	Yes	
EAN code	5025768510689	
E-number Fl	4274042	
Certifications	F-mark	
Mount	Three circuit track	
Long description	Fully adjustable spotlight using cutting edge LED technology and adjustable lens. Adjustable optics provides wide flood 65 degrees which can be adjusted to 10 degree spot without the need for additional lenses and reflectors. Cast cooling fin design to maximise thermal management and reduction of LED junction temperature. IR/U free light source without heat radiation. On-board dimming available. Long Life 50K hours, fit and forget maintenance free lighting solution. Choice of colour temperature warm 3000K & neutral 4000K. Beacon Muse offers high CRI minimum 90 (typical 95) ideal for museum, galleries and high end shop lighting applications	
Product name	Beacon Muse 3000K DIM L3 SIL	
Environment	Interior	
General application	Museum & Gallery	
Housing	Die-cast aluminium	
National safety marks	ENEC	
Specific application	Museum & Gallery, Shop window, Track lighting	
Sales pack quantity	1	
Optical data		
CRI (Ra)	95	
Beam angle (°)	10° Wide flood 65°	
Colour temperature (K)	3000	
Distribution type	Adjustable	
Electrical data		
Total power consumption (W)	13	
Voltage (V)	230	
Electrical protection	Class I	

1

1

Included

Integral

Number of heads

Transformer availability

Transformer mounting

Total number of lamps

Beacon Muse - 3000K on-board dimming - 13W

Beacon Muse 3000K DIM L3 SIL

2051068


Physical data		
Weight (kg)	1.00	
Colour	Silver	
Lamp included	Yes	
Included lamp	Integrated LED	
Height (mm)	141	
IP rating	20	
Vertical tilt (°)	90°	
Horizontal rotation (°)	355°	
Diameter (mm)	79	
Safety distance	0.8	
Track adaptor type	Three circuit track	
Single package dimensions (L x W x H) (cm)	17.50 x 15.00 x 17.50	
Outer package dimensions (L x W x H) (cm)	17.50 x 15.00 x 17.50	

Beacon Muse - 3000K on-board dimming - 13W


Beacon Muse 3000K DIM L3 SIL

2051068

PHOTOMETRY

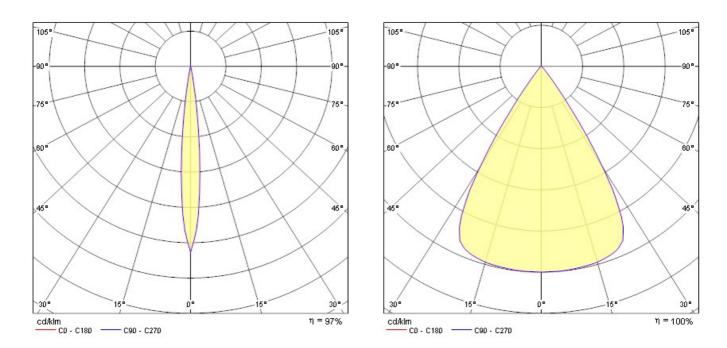

TECHNICAL DRAWINGS



ENERGY LABEL

Beacon Muse - 3000K on-board dimming - 13W

Beacon Muse 3000K DIM L3 SIL

2051068

